


Electrical Character:  
 100% Open/Short  
 Hi-Pot:600V AC 0.5mA 1Second

Wire Diagram		
P1		P2
1	Black	Shell
4	Stra	Pin

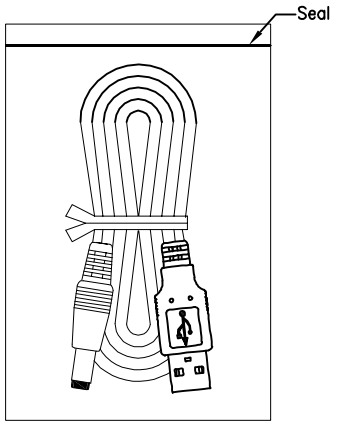

④	Molding	PVC 45P Color:Black	
③	Connector	DC Plug φ5.5*2.1*23.5MM Solder Type PBT Black	1Set
②	Connector	USB 2.0REV A Type Male White Insulator Solder Type	1Set
①	Cable	UL2468 2C 22AWG, 300V, 80°C, φ3.6mm, PVC 80P,	
NO.	Part	Specification	Q'ty

A5				DR.BY.: Tom Liu	TITLE : USB TO DC CABLE	GENERAL TOLERANCE:			UNIT:	SCALE:	SHEET:		A4
A4				CHKD.: Jack Wu		LINEAR	ANGLES						
A3				APPD.: Kane He	X.: ±0.30	X': ±5.0'							
A2					X.X: ±0.20	X.X': ±3.0'							
A1	ORIGINAL	Tom Liu	Jul-29-2015		DWG. NO.: CXRD150729-008	X.XX: ±0.15	X.XX': ±2.0'						
REV.	ECN. NO.	DR.BY.	DATE		DATE: Jul-29-2015	X.XXX: ±0.10	X.XXX': ±1.0'	mm	1:1	1/1	THIRD ANGLE PROJECTION		