



模块推荐使用方向

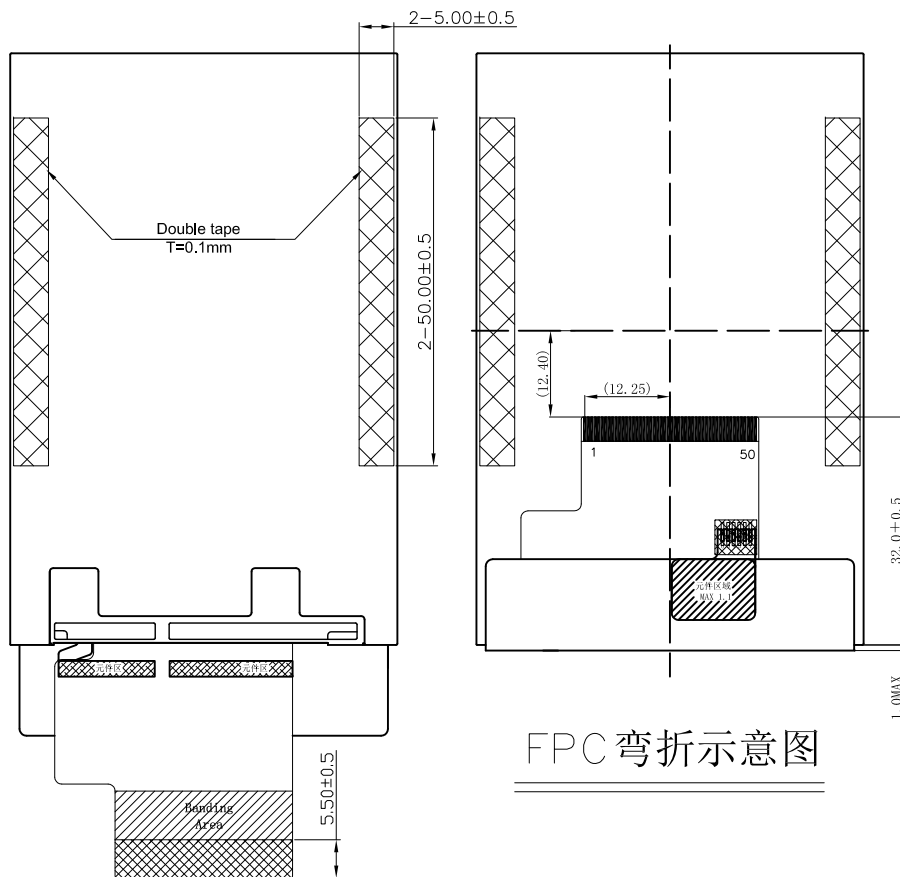

人眼

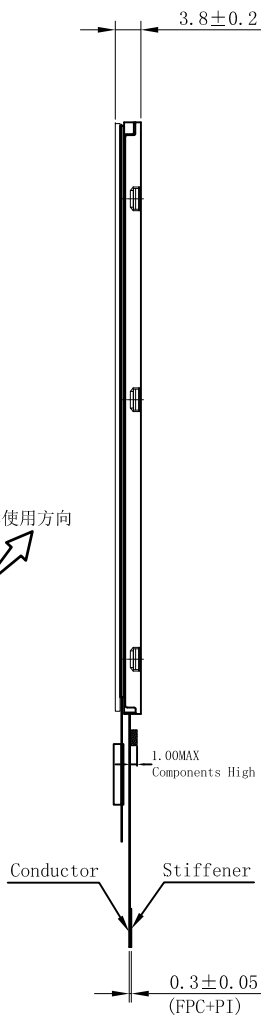


FPC 弯折示意图

- CTP NOTE:
1. LENS+ITO Glass+FPC+adhesive
 ITO GLASS:0.4mm
 LENS:GLASS 0.7mm
 IC:FT5336I
 2. Operation Voltage: 2.8V-3.3 V
 3. Transmittance: ≥87%
 4. The cover hardness: 3H
 6. Operation Temp.: -10°C~+60°C, ≤90%RH
 7. Storage Temp.: -20°C~+70°C, ≤90%RH

PIN	SYMBOL
1	LEDK
2	LEDA
3	LEDA
4	LEDA
5	LEDA
6	IM0
7	IM1
8	IM2
9	NC
10	/RESET
11	VSYNC
12	HSYNC
13	DOTCLK
14	DE
15	DB17
16	DB16
17	DB15
18	DB14
19	DB13
20	DB12
21	DB11
22	DB10
23	DB9
24	DB8
25	DB7
26	DB6
27	DB5
28	DB4
29	DB3
30	DB2
31	DB1
32	DB0
33	SDD
34	SDI
35	/RD
36	/WR_SCL
37	RS
38	/CS
39	TE
40	IDVCC
41	IDVCC
42	VCI
43	GND
44	CTP_SCL
45	CTP_SDA
46	CTP_IRQ
47	CTP_RES
48	GND
49	GND
50	GND

- NOTES:
1. DISPLAY TYPE: 3.5" TFT
 2. VIEWING DIRECTION: 6 o'clock
 4. POLARIZER MODE: TRANSMISSIVE/POSITIVE
 5. RECOMMEND CONNECTOR:
 6. OPERATING TEMP: -20°C~+70°C
 7. STORAGE TEMP: -30°C~+80°C
 8. UNMARKER TOLERANCE: ±0.20
 9. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



BL CIRCUIT DIAGRAM
 VF=18-22V IF=20mA

REV.	CONTENT	DATA	TOLERANCE	MODEL	YX350HV15-CT
C	Add double tape	2015.04.02	DRAWING	LGZ	DATE 2015.04.02
B	Modify CTP FPC, Change CTP IC	2014.08.19	CHECK		DATE
A	NEW	2014.04.24	APPROVE		DATE

PAGE	1 of 1	UMIT	mm	
SCALE		SIZE	A4	