

▼ D-Sub Connectors

RS232 Wireable Plug



P 1696

Price Each	RRP	4+	10+
P 1695 DE9 female	new 13.50	12.15	10.95
P 1696 DE9 male	10.95	9.85	8.75

DE15 (VGA) Wireable Plug




Price Each	RRP	4+	10+
P 1693	10.95	9.85	8.75

IDC Termination





All models feature strain relief cable clamp system.

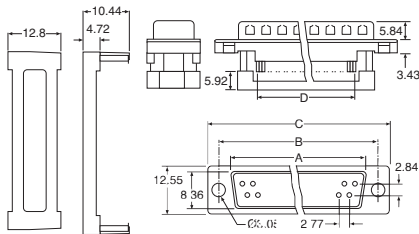

Type	A	B	C	D
DE9/DE15 Male	17	25	31	10
DE9/DE15 Female	16	25	31	10
DA15 Male	25	33	39	18
DA15 Female	24	33	39	18
DB25 Male	39	47	53	30.5
DB25 Female	38	47	53	30.5

Price Each	RRP	10+	50+
Plastic Series 7901			
P 4120 DE9 male	3.35	3.00	2.70
Metal Series 7901			
P 4122 DE9 male	3.85	3.45	3.10
P 4123A DE9 female	3.85	3.80	3.10
P 4132 DA15 male	4.15	3.70	3.30
P 4133 DA15 female	4.15	3.70	3.30
P 4152A DB25 male	4.35	3.90	3.45
P 4153A DB25 female	4.35	3.90	3.45

Straight Pins PCB Mount With Board Locks



Type	A	B	C	D
DE9 Male	17	25	31	19
DE9 Female	16	25	31	19
DA15 Male	25	33	39	27
DA15 Female	24	33	39	27


Price Each	RRP	10+	50+
Series: 7905			
P 3043 DE9 male	3.55	3.20	2.90
P 3053 DE9 female	3.55	3.20	2.90
P 3143 DA15 male	4.00	3.55	3.15
P 3153 DA15 female	4.00	3.55	3.15

Straight Pins PCB Mount



P 3140

P 3085







*P 3085 is not Ouplin brand. Fixed hex nuts attached.

Type	A	B	C	D
DE9/DE15 Male	17	25	31	19
DE9/DE15 Female	16	25	31	19
DA15 Male	25	33	39	27
DA15 Female	24	33	39	27
DB25 Male	39	47	53	41
DB25 Female	38	47	53	41

Price Each	RRP	10+	50+
Series: 7905			
P 3040 DE9 male	2.35	2.15	1.90
P 3050 DE9 female	2.35	2.15	1.90
P 3140 DA15 male	2.55	2.30	2.00
P 3150 DA15 female	2.55	2.30	2.00
P 3240 DB25 male	3.10	2.70	2.40
P 3250 DB25 female	3.10	2.70	2.40
P 3085* DE15 female	3.90	3.55	2.90


Right Angle PCB Mount

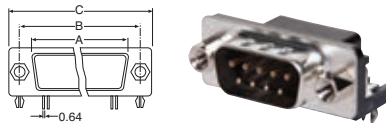

Type	A	B	C	*P 3084A is not Ouplin brand.
DE9/DE15 Male	17	25	31	
DE9/DE15 Female	16	25	31	
DA15 Male	25	33	39	
DA15 Female	24	33	39	
DB25 Male	39	47	53	
DB25 Female	38	47	53	

Price Each	RRP	10+	50+
Series: 7906			
P 3020 DE9 male	2.70	2.45	2.20
P 3030 DE9 female	2.70	2.45	2.20
P 3120 DA15 male	3.10	2.70	2.40
P 3130 DA15 female	3.70	3.35	2.95
P 3220 DB25 male	3.55	3.20	2.90
P 3230 DB25 female	4.80	4.30	3.85
P 3084A DE15 female*	3.40	3.10	2.90
P 3084B DE15 female (7912)	2.95	2.70	2.50

Standard Solder Pins

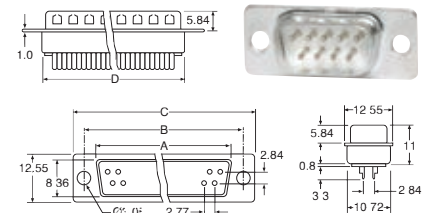

Type	A	B	C	D
DE9/DE15 Male	17	25	31	19
DE9/DE15 Female	16	25	31	19
DA15 Male	26	33	39	27
DA15 Female	25	33	39	27
DB25 Male	39	47	53	41
DB25 Female	38	47	53	41

Price Each	RRP	10+	50+
Series: 7907			
P 3000 DE9 male	1.40	1.15	1.10
P 3010 DE9 female	1.40	1.15	1.10
P 3100 DA15 male	1.70	1.50	1.45
P 3110 DA15 female	1.70	1.50	1.45
P 3200 DB25 male	1.85	1.60	1.55
P 3210 DB25 female	1.85	1.60	1.55
P 3070 DE15 male (7917)	3.40	2.90	2.70
P 3080 DE15 female (7917)	3.40	2.90	2.70

Metallised RF Shielded Backshell



For use in applications where protection from RF interference is required. Easy screw together construction.

Price Each	RRP	10+	50+
P 3093 9 Pin	5.95	5.50	4.95

Plastic Backshells



Available in snap together or screw together design.

Price Each	RRP	10+	50+
Snap Together			
P 3091 9 Pin	2.10	1.85	1.60
P 3191 15 Pin	2.10	1.85	1.60
P 3291 25 Pin	2.10	1.85	1.60
Screw Together			
P 3090 9 Pin	1.95	1.70	1.50
P 3190 15 Pin	1.95	1.70	1.50
P 3290 25 Pin	2.30	2.00	1.70

Backshell Hardware



P 3310

P 3315

Spacers & hex extension nuts suit all backshell models. P 3310-12: UNC 400 thread.

Price Each	RRP	10+
Spacer Sets		
P 3310 Pk20 8mm	9.00	8.50
P 3312 Pk200 8mm	77.50	69.00
Hex Extension Nuts		
P 3315 Pk20	5.70	5.20
P 3316 Pk200	39.95	35.00