




## SMD3535 RGBW Addressable LED strip

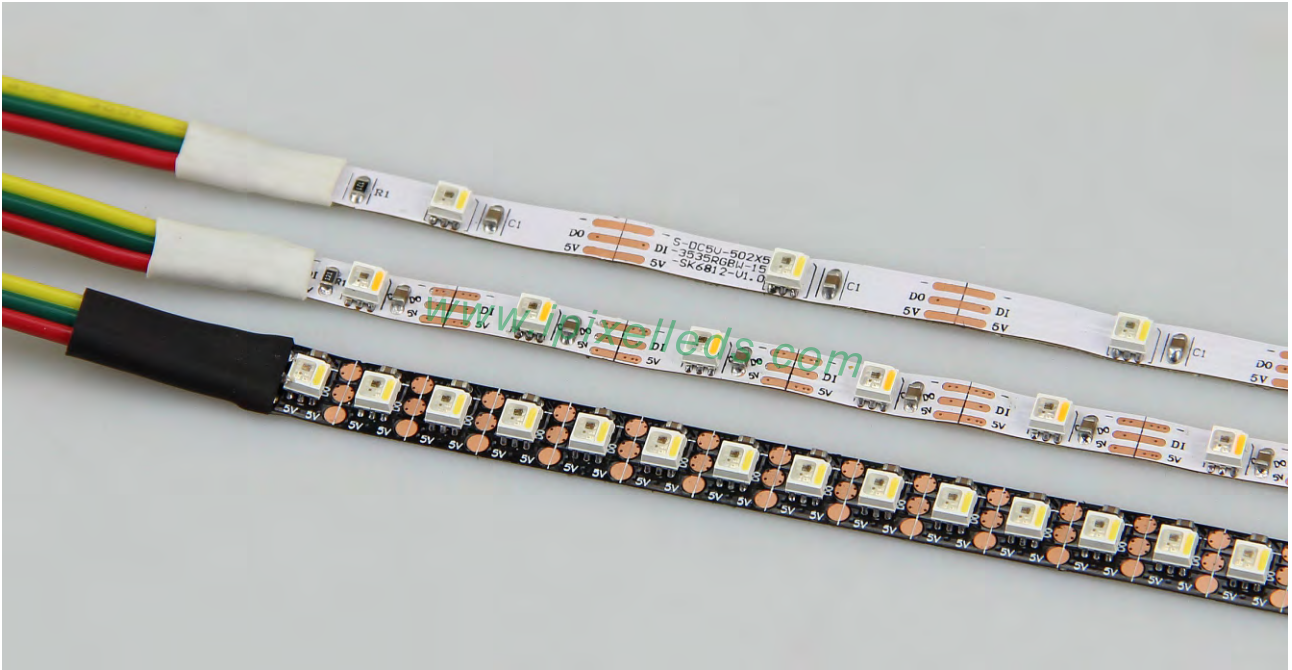

### Product Description

This SMD 3535 RGBW Addressable LED Strip with 60LEDs and 60Pixels per meter(individually controlled every LEDs)

Compare with RGB led strip , there are one more white color, more lighting effects for us,The color(CCT) of White can be warm white,nature white,pure white and cold white.



Colors are rich and varied, It can realize different changing effects in the controller.

5mm width, Light and thin: suitable for installation in narrow space. Easy and free cutting and welding: You can cut and weld all kinds of length according to the above cutting mark.

5 Meter per reel, Customized sizes are also available.



## Product Datasheet

Product Number	S005060DA4SA1
Light Source	SMD 3535 RGBW
Beam Angle	120°
LED Quantity	60 leds/m
CCT	RGBW 2800-3200K
Wavelength (nm/m)	R:620-630 G:515-525 B:460-470
Protocol	SK6812
PCB Color	White/Black
Operating Voltage	DC5V
Power (W)	13W/M
Size (mm)	L 1000* W 5 (pcb)
IP	IP 20/IP 65
Net Weight	0.13kg/roll
Operation Temperature	- 40 ~ 50 °C

## Application



Hotels ,restaurants, nights clubs, edge light

Recreational machines, playstation



Living rooms, coffee / wine bars, back lighting

TV, dancefloor background, shopping malls,

## Strip IP Rate





## Curve Lune



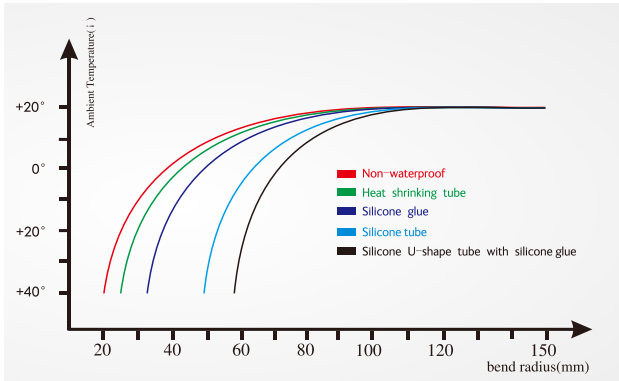



Diagram2: Bend Curve

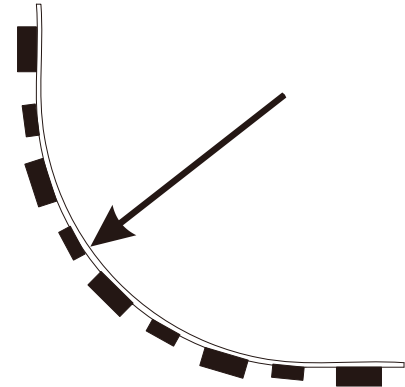


## Installation




Cut in specific location




Put the PCB in the space between clip and connector, make the clips exactly aim at welding point




Close the cover of connector

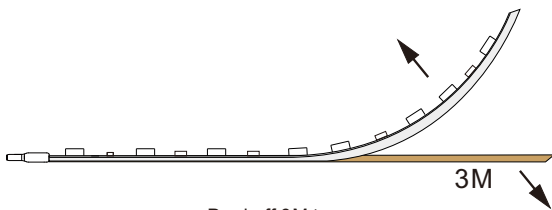


Peel off 3M tape

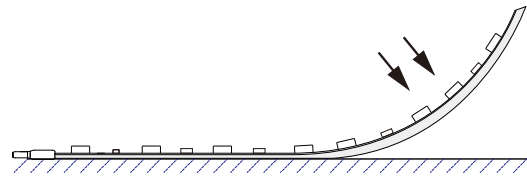

Stick the 3M

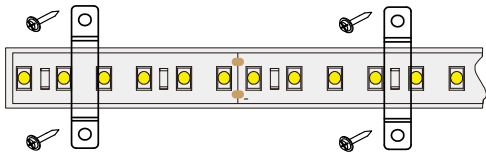

Install with clips

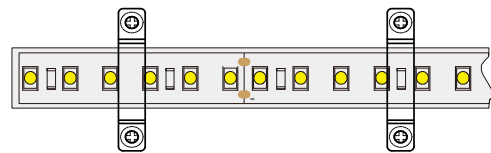

Fix with screws

## Accessories (Excluded)



Screws




Silicone clip



End cap




## Outline Dimension (unit:mm)

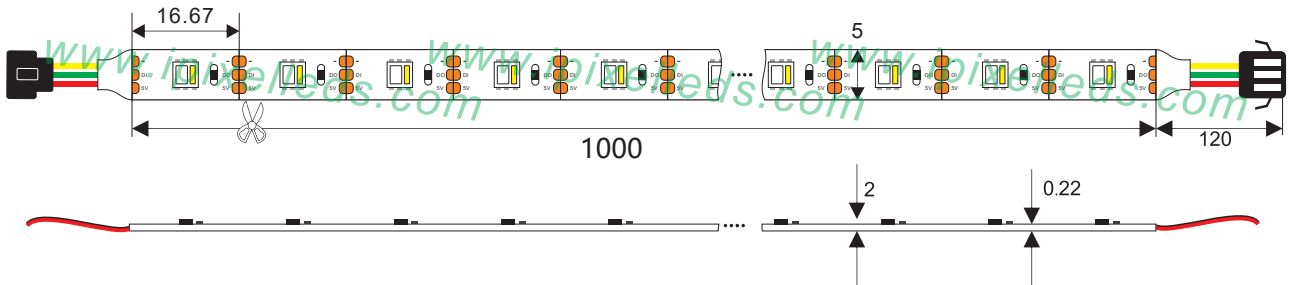

## Connection


RGBW LED strip light

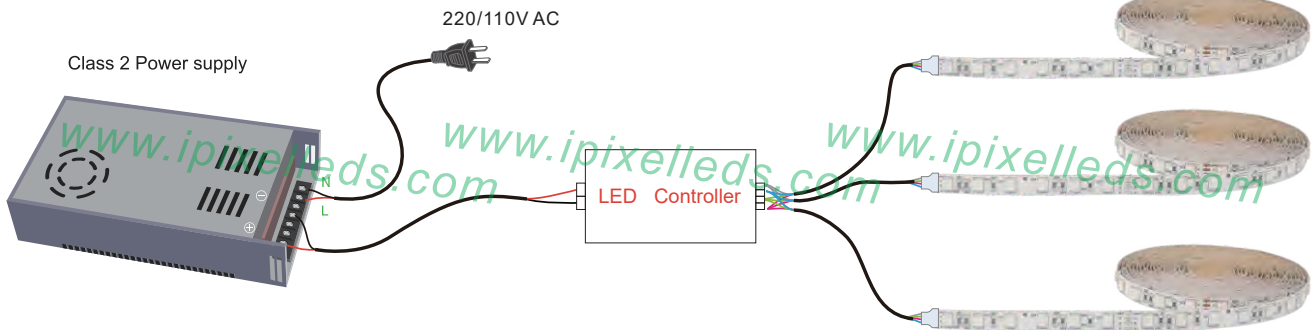

### NOTES

1. Please apply different IP rate products according to different environment conditions;
2. Only install with Class 2 power unit
3. Do not install it when power is on. Before powering on, please make sure the wiring is correct;
4. Avoiding damaging the circuit or other component on the strip;
5. Avoid dragging, do not over bending during installation;
6. In order to get the best lighting effect, please do not connect overlong;
7. Please do not stare at the light for long time when it is working to protect your eyes;
8. Installation required by a qualified electrician
9. Supply cable – R/C (AVLV2/8), external use style, rated minimum 300 V, 80 °C, minimum 22 AWG

## Product packaging

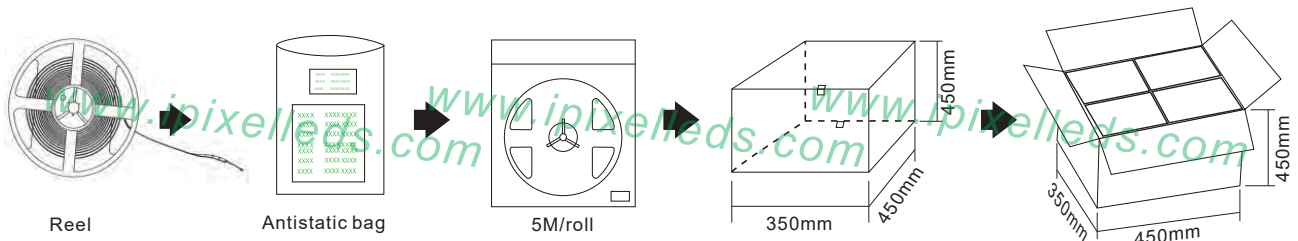

Product number	Standard length	Quantity / volume	outer carton size	Weight(kg)/reel
S005060DA4SA1(IP20)	5M	240 Reels	L450xW350xH450mm	0.13kg
/				/
/				/
/				/
/				/
/				/